


## Removing and installing cover for MMI screen

### Special tools and workshop equipment required

- ♦ Removal wedge -3409-
- ♦ Suction cup -VAS 6788-

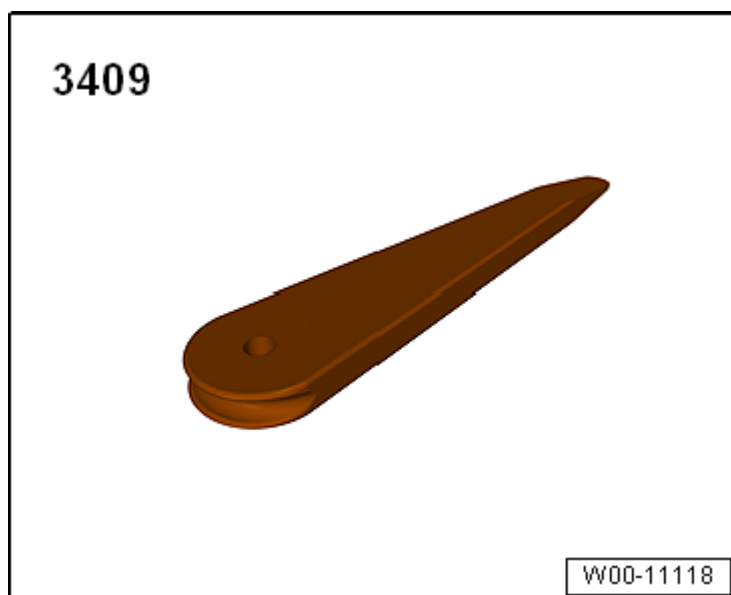

### Removing

- Clean cover -1- with a clean cloth, apply suction cup -VAS 6788- and press it firmly onto cover.
- Pull on suction cup -VAS 6788- to unclip cover.



#### Note

Considerable force is required to unclip the cover; if it is difficult to detach, use removal wedge -3409-.

### Installing

Installation is carried out in the reverse order; note the following:

**Notes for installation: tightening torques, renewing components etc.**

→ Chapter „Exploded view - dash panel“

