

## Checking lambda control


### Checking lambda control and lambda probe -G130 and -G131 downstream of catalytic converter

#### Special tools and workshop equipment required

- ◆ V.A.G 1526 A
- ◆ V.A.G 1594 A
- ◆ V.A.G 1598/31
- ◆ V.A.G 1788/10
- ◆ VAS 5051 with VAS 5051/1

or

- ◆ V.A.G 1551 with V.A.G 1551/3 A

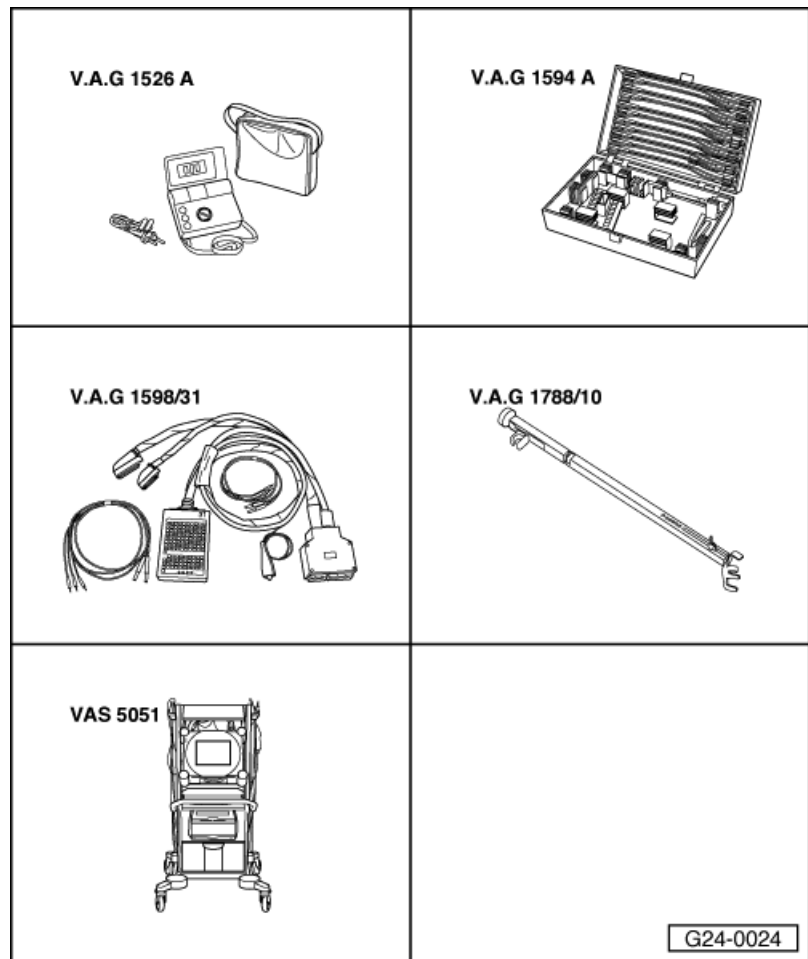


#### Note:


The lambda control downstream of the catalytic converter has priority over the lambda control upstream of the catalytic converter and is used as correction control.

→ It corrects slight mixture changes (e.g. enriches) through the lambda probe upstream of catalytic converter, by maintaining the lambda control for a certain period (dwell time) at the upper / lower point. If the time is in the positive range (e.g. 50 ms), the mixture is made richer. If it is in the negative range (e.g. -50 ms), the mixture is made leaner.

**Fitting location of connector for lambda probe 2 downstream of catalytic converter:**

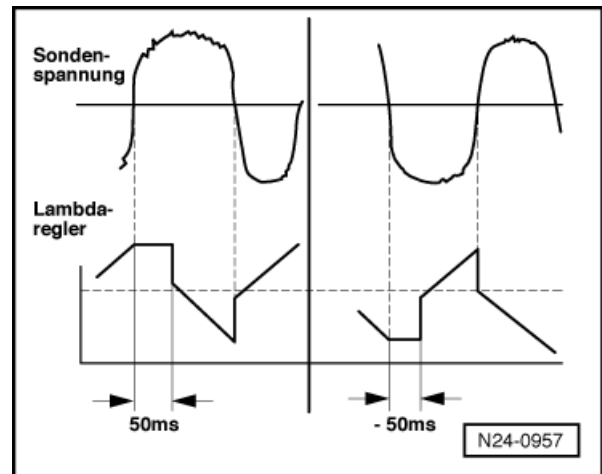

→ The four-way connector for the lambda probe 2 (G130) bank 1 is under the mat on the passenger side.

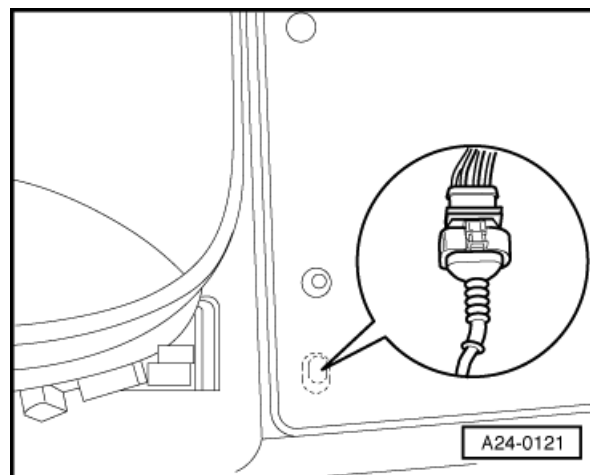


→ The four-way connector for lambda probe 2 (G131) bank 2 is under the mat on the driver's side.

#### Test conditions

- Perform road test and do not erase fault memory.
- Coolant temperature at least 85 °C.

#### Test sequence

- Connect the vehicle diagnostic, testing and information system VAS 5051 or fault reader V.A.G 1551 and select engine electronics control unit 1 with "Address word" 01 => Page 01-15. For this purpose, the engine must be running at idling speed.

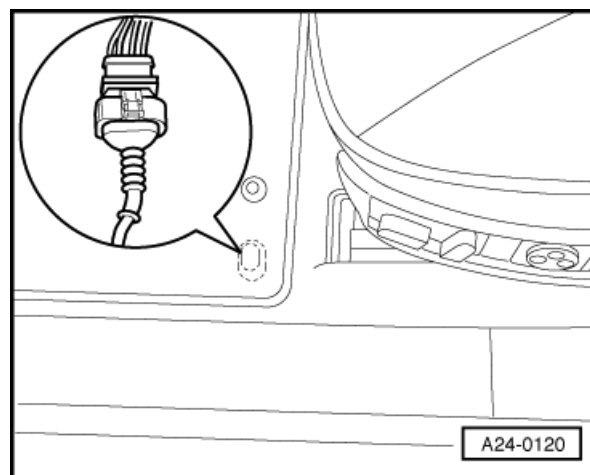

→ Indicated on display

- Enter "04" to select "Start basic setting" and confirm with Q key.

#### Note:

*During basic setting, the solenoid valve for the activated charcoal filter (valve -N80) is closed and the air conditioner compressor is switched off.*

→ Indicated on display

- Enter "034" for "display group number 034" and confirm entry with Q key.

→ Indicated on display

- Set engine speed to 2800...3200 rpm using engine speed controller V.A.G 1788/10.
- Perform the test as soon as an exhaust gas temperature above 200°C is attained in display zone 2.

#### Note:

*This process can take a few minutes.*

- Press C key.
- Set engine speed to 1900...2400 rpm using engine speed controller V.A.G 1788/10.

→ Indicated on display

Rapid data transfer    HELP  
Select function XX

Initiate basic setting    Q  
Enter display group number XXX

System in basic setting 34    →  
1   2   3   4

- Enter "030" for "display group number 030" and confirm entry with Q key.

→ Indicated on display

- Check lambda probe status for lambda probe downstream of catalytic converter in display zones 2 and 4.

**Note:**

The "Lambda probe status" indicates the condition of the lambda control and the lambda probes.

	Display zones			
	1	2	3	4
<b>Display group 030: Lambda status at idle</b>				
<b>Display</b>	X X X	X X X	X X X	X X X
<b>Display</b>	Lambda probe status, bank 1, probe 1	Lambda probe status bank 1, probe 2	Lambda probe status, bank 1, probe 2	Lambda probe status bank 2, probe 2
<b>Range</b>	0 = off 1 = on	0 = off 1 = on	0 = off 1 = on	0 = off 1 = on
<b>Specified value</b>	1 1 1	1 1 1	1 1 1	1 1 1
<b>Note</b>	Explanation of display => Page 24-114			

**Notes:**

- ◆ The lambda control of lambda probe downstream of catalytic converter (bank 1-probe 2 and bank 2-probe 2) is not active without engine load.
- ◆ The first digit of the 3-digit display (heating) fluctuates between 0 and 1.
- ◆ The third digit of the 3-digit display (lambda control) fluctuates between 0 and 1.

**Significance of 3 digit readout of display group 30**

1	1	1	<b>Display zones 1 to 4</b>
		X	Lambda control 0 = inactive 1 = active
	X		Lambda probe condition 0 = inactive 1 = active
X			Condition of lambda probe heating 0 = inactive 1 = active

**Checking lambda control downstream of catalytic converter**

- Carry out a road test lasting at least 10 minutes.

→ Indicated on display

- Enter "037" for "display group number 037" and confirm entry with Q key.

→ Indicated on display

Initiate basic setting Q  
Enter display group number XXX

System in basic setting 30 ⇒  
1 2 3 4

Initiate basic setting Q  
Enter display group number XXX

System in basic setting 37 ⇒

1 2 3 4

- Check lambda probe voltage in display zone 2.
- Check dwell time between lambda probe 1 upstream of catalytic converter and lambda probe 2 downstream of catalytic converter in display zone 3 and diagnosis result in display zone 4.

Display zones				
	1	2	3	4
<b>Display group 037: Diagnosis, lambda control system (Bank 1)</b>				
<b>Display</b>	xxx %	x.xxx volts	xxx ms	Test ON
<b>Display</b>	Engine load	Voltage of lambda probe downstream of catalytic converter, bank 1	Lambda correction value between lambda probe 1 and lambda probe 1, bank 2	Diagnosis status
<b>Range</b>	15...150 %	0...10.000 V	- 1200...1200 ms	Test OFF Test ON Syst. OK Syst. NOK
<b>Specified value</b>	14...24 %	0...10.000 V	-800...800 ms	Syst. OK
<b>Note</b>		If specified value is not attained: Evaluation, display zone 2 =>Page 24-112.	If specified value is not attained: Continued =>Page 24-113.	If "Syst. NOK" is displayed: Interrogate fault memory => Page 24-113.

**Note on display zone 3:**

The lambda control downstream of the catalytic converter has priority over the lambda control upstream of the catalytic converter and is used as a guidance control. It corrects slight rich / lean mixture changes in the lambda probe upstream of catalytic converter, by maintaining the lambda control upstream of catalytic converter at the upper / lower point for a certain period of time (dwell time). If the time is in the positive range (e.g. 50 ms), the mixture is made richer. If it is in the negative range (e.g. -50 ms), the mixture is made leaner.

- Press the Ckey.
- Press keys 0, 3 and 8 for "display group number 38" and confirm entry with Q key.

→ Indicated on display:  
(1...4 = display zones)

System in basic setting 38 ⇒

1 2 3 4

Display zones				
	1	2	3	4
<b>Display group 038: Lambda control system diagnosis (Bank 2)</b>				
<b>Display</b>	xxx %	x.xxx volts	xxx ms	Test ON
<b>Display</b>	Engine load	Voltage of lambda probe downstream of catalytic converter, bank 2	Lambda correction value between lambda probe 1 and lambda probe 2, bank 2	Diagnosis status
<b>Range</b>	15...150 %	0.000...1.000 volts	- 1200...1200 ms	Test OFF Test ON Syst. OK Syst. NOK

Specified value	14...24 %	0...10.000 V	-800...800 ms	Syst. OK
Note		If specified value is not attained: Evaluation, display zone 2 =>Page 24-112.	If specified value is not attained: Continued =>Page 24-113.	If "Syst. NOK" is displayed: Interrogate fault memory => Page 24-113.

**Note on display zone 3:**

The lambda control downstream of the catalytic converter has priority over the lambda control upstream of the catalytic converter and is used as a guidance control. It corrects slight rich / lean mixture changes in the lambda probe upstream of catalytic converter, by maintaining the lambda control upstream of catalytic converter at the upper / lower point for a certain period of time (dwell time). If the time is in the positive range (e.g. 50 ms), the mixture is made richer. If it is in the negative range (e.g. -50 ms), the mixture is made leaner.

**Evaluation of display groups 037 and 038**

Display group 37/38		
Display zone: 2	Possible causes of fault	Fault remedy
approx. 0.450 V	<ul style="list-style-type: none"> <li>- Open circuit in wire 4 between lambda probe and control unit</li> <li>- Open circuit in wire 3 between lambda probe and control unit</li> <li>- Lambda probe heating defective</li> <li>- Lambda probe defective</li> </ul>	<ul style="list-style-type: none"> <li>- Check signal wiring and actuation =&gt; Page 24-122</li> <li>- Check lambda probe heating =&gt;Page 24-114. Fit a new lambda probe</li> </ul>
Greater than 1.100 V	<ul style="list-style-type: none"> <li>- Short to positive in wire 4 between lambda probe and control unit</li> </ul>	<ul style="list-style-type: none"> <li>- Check lambda probe wiring bank 1, lambda probe 2 (downstream of catalytic converter) =&gt; Page 24-126</li> </ul>
Less than 0.100 V	<ul style="list-style-type: none"> <li>- Short to earth in wire 4 between lambda probe and control unit</li> <li>- Short circuit between wires 3 and 4</li> </ul>	<ul style="list-style-type: none"> <li>- Check lambda probe wiring bank 2, lambda probe 2 (downstream of catalytic converter) =&gt; Page 24-130</li> </ul>

**Cont.**

If specification in display zone 3 or 4 is not attained:

- Check for air leak at exhaust or catalytic converter (check screw clamps and exhaust for damage)
- Replace appropriate lambda probe "upstream of" catalytic converter.