


Removing and installing trim panel with switch module on right


Special tools and workshop equipment required

- ♦ Removal wedge -3409-

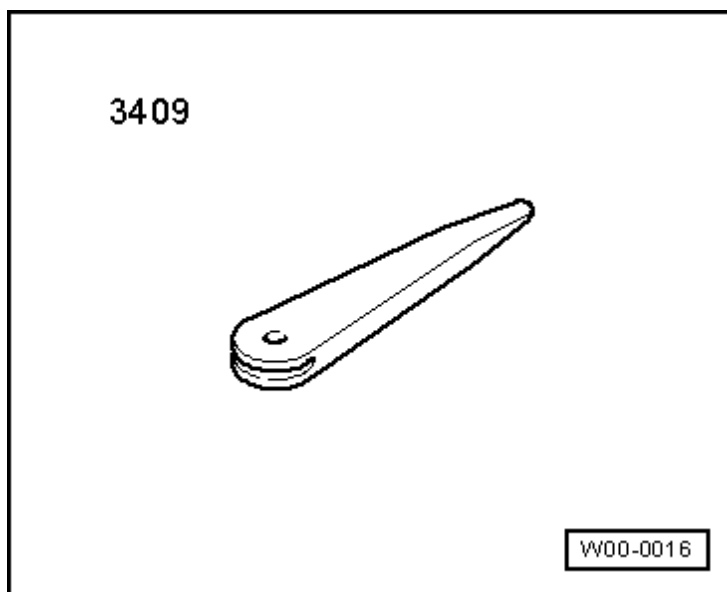

Removing

- Open the coin tray.
- Slide the trim for the coin tray to the left out of the fastener -arrow- and detach.

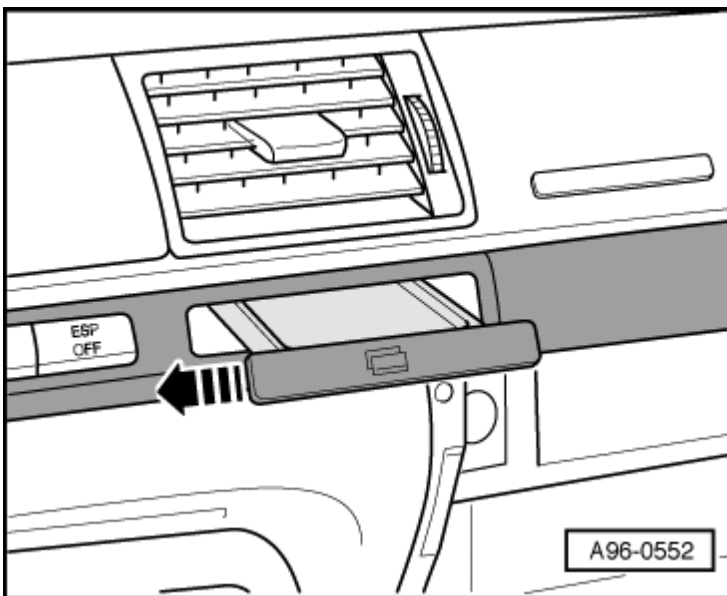


- Open the glove compartment.
- Starting from above the glove compartment, carefully separate the trim panel with the switch module -1- from the dash panel using the removal wedge -3409-.
- Detach the trim panel with switch module in -arrow direction-.



Note

Take particular care when releasing the clip at the driver side end of the trim panel.

- Unplug the connector.

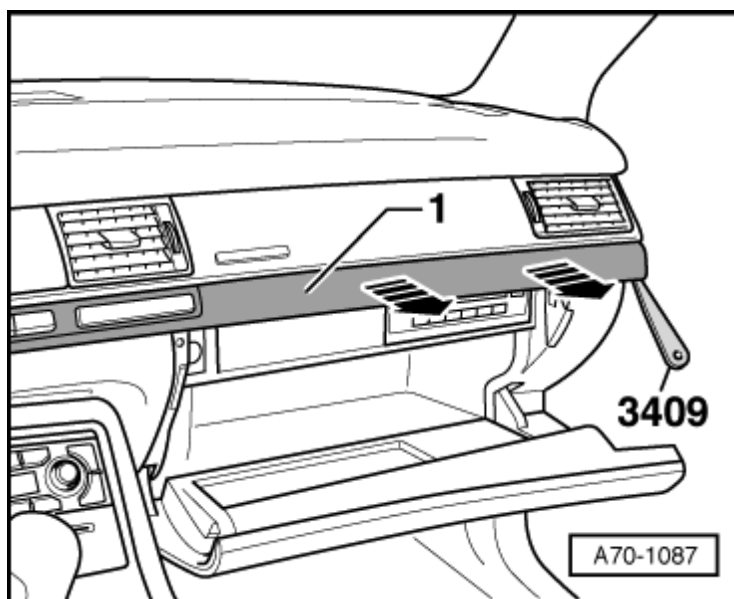

Installing

Install in reverse order, paying attention to the following:

- When inserting the trim panel -1- with switch module, make sure the two fasteners in the centre of the panel are inserted between the dash panel and the monitor housing -arrows-.

