

Audi > A8/A8L > 2004-2008


Electrical Equipment

92 - Removal and Installation

.

Spray Nozzles, from 09.07

Removing

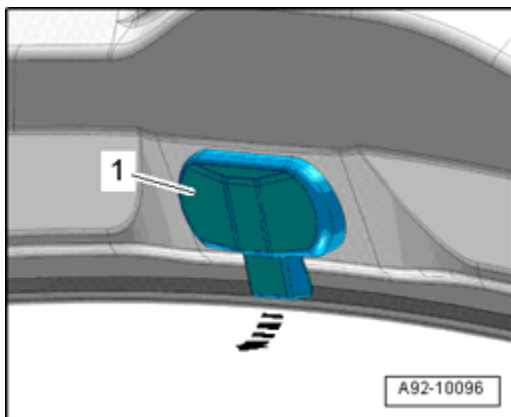

- Unclip the windshield washer spray nozzle - **1** - downward from hood - **arrow** - .

- Release the securing clip - **3** - in the direction of the - **arrow** - and remove the washer fluid line - **1** - from the windshield washer system spray nozzle.
- Disconnect electrical harness connector - **1** - , if present.

Installing

Install in reverse order of removal, observing the following:

- Make sure the securing clip engages audibly in the washer line connection when connecting the line.
- Insert nozzle in hood.

Copyright © 2008 Audi of America, Inc. and Bentley Publishers. All rights reserved. Last processed: